

Model of a pipe robot with limited interactions

K. Ragulskis¹, B. Spruogis², A. Matuliauskas³, V. Mištinas⁴, L. Ragulskis⁵

¹Kaunas University of Technology, K. Donelaičio str. 73, LT-44249, Kaunas, Lithuania

^{2,3,4}Department of Mobile Machinery and Railway Transport, Faculty of Transport Engineering, Vilnius Gediminas Technical University, Plytinės str. 27, LT-10105, Vilnius, Lithuania

⁵Department of Systems Analysis, Faculty of Informatics, Vytautas Magnus University, Vileikos str. 8, LT-44404, Kaunas, Lithuania

¹Corresponding author

E-mail: ¹kazimieras3@hotmail.com, ²bronislovas.spruogis@gmail.com, ³arvydas.matuliauskas@vgtu.lt, ⁴vygantas.mistinas@gmail.com, ⁵l.ragulskis@if.vdu.lt

Received 19 September 2022; received in revised form 9 December 2022; accepted 20 December 2022
DOI <https://doi.org/10.21595/mme.2022.22941>



Copyright © 2022 K. Ragulskis, et al. This is an open access article distributed under the Creative Commons Attribution License, which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

Abstract. Nonlinear interactions between the exciting mass and the case of a pipe robot are important in order to prevent impacts of the exciting mass with the case of the pipe robot. Those impacts lead to deterioration of operation of a pipe robot and even may lead to destruction of some parts of the robot. Model for the analysis of dynamics of a pipe robot with limited interactions is proposed in this paper. For this purpose, a special expression of nonlinear stiffness is used. Results of investigations for various parameters of the system are presented.

Keywords: pipe robot, limited interactions, nonlinear stiffness, steady state motions.

1. Introduction

Nonlinear interactions between the exciting mass and the case of a pipe robot are important in order to prevent impacts of the exciting mass with the case of the pipe robot. Those impacts lead to deterioration of operation of a pipe robot and even may lead to destruction of some parts of the robot.

Model for the analysis of dynamics of a pipe robot with limited interactions is proposed in this paper. For this purpose, a special expression of nonlinear stiffness is used. Results of investigations for various parameters of the system are presented.

Resonances of dynamical systems are investigated in [1]. Impact motions are analyzed in [2]. Stabilization of vibrating systems is investigated in [3]. Vibrations and impacts are analyzed in [4]. Periodic orbits of dynamical systems are investigated in [5]. Energy sink of vibro-impact type is analyzed in [6]. Impact of a particle with a wall is investigated in [7]. Investigation of frequencies of a dynamical system is presented in [8]. Dynamics of a pendulum is analyzed in [9]. System with piecewise linearity is investigated in [10]. Vibrating system with resonant zones is analyzed in [11]. Investigation of the Sommerfeld effect is described in [12]. Dynamical systems with isolated resonances are analyzed in [13].

Similar model of a pipe robot without interactions of limited displacement type is investigated in [14]. Main objective of this paper is to investigate the effect of interactions of limited displacement type to the dynamic behavior of a pipe robot.

Model of a pipe robot with two degrees of freedom and nonlinear interactions of limited relative displacement type is described. Then results of numerical investigations for various parameters of the investigated pipe robot are presented.

2. The model of a system with limited displacements

The system is described by the equation:

$$x'' + 2hx' + \frac{1}{1 - |x|}x = f \sin \nu t, \quad (1)$$

where x denotes the displacement, h denotes the coefficient of viscous friction, f denotes the amplitude of excitation, ν denotes the frequency of excitation, τ denotes the time and prime denotes differentiation with respect to the time.

2.1. Conservative model when $h = 0, f = 0$

Results for $x(0) = 0, x'(0) = 1$ are shown in Fig. 1. Results for $x(0) = 0, x'(0) = 1.5$ are shown in Fig. 2.

For greater value of initial velocity, the effect of nonlinear stiffness is greater, and this is clearly seen from the dependence of force of stiffness from displacement.

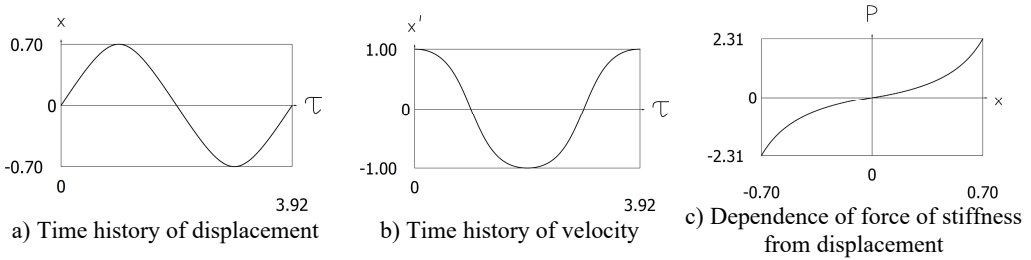


Fig. 1. Conservative system for $x(0) = 0, x'(0) = 1$

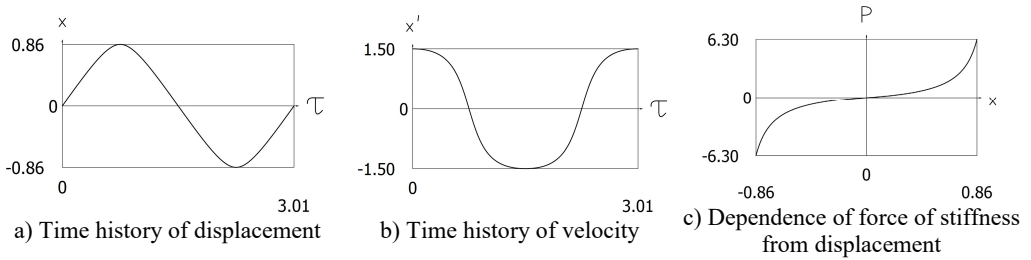


Fig. 2. Conservative system for $x(0) = 0, x'(0) = 1.5$

2.2. Amplitude frequency characteristics of the conservative model

Amplitude frequency characteristics for the displacement and for the velocity are shown in Fig. 3.

Hardening effect is seen from the presented results. For higher nonlinearity the increase of the amplitude of the third harmonic is seen.

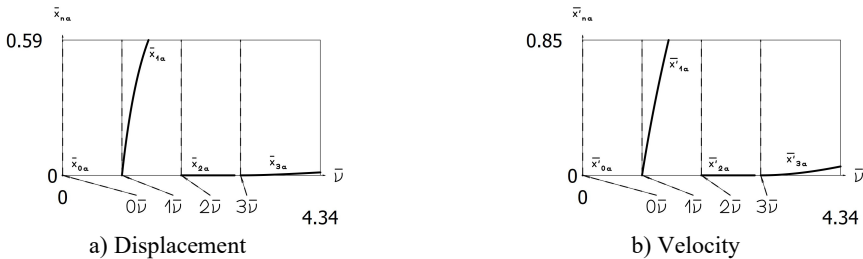


Fig. 3. Amplitude frequency characteristics: constant part and amplitudes of the first three harmonics

2.3. Dynamics of the forced dissipative model

The parameters of the system are set to $h = 0.1, f = 1$. Steady state solutions are depicted in Fig. 4 and in Fig. 5.

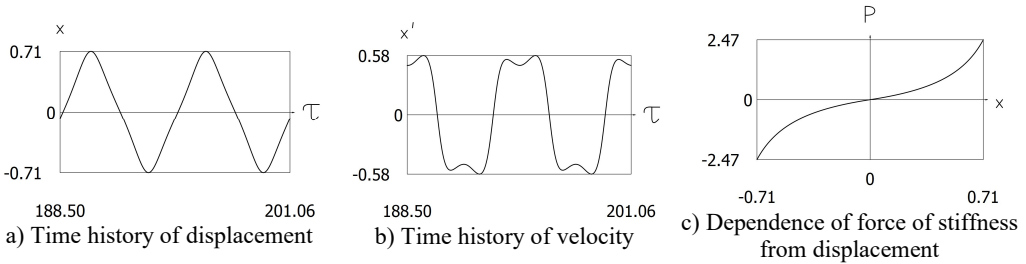


Fig. 4. Steady state motion for $h = 0.1, f = 1, v = 1$

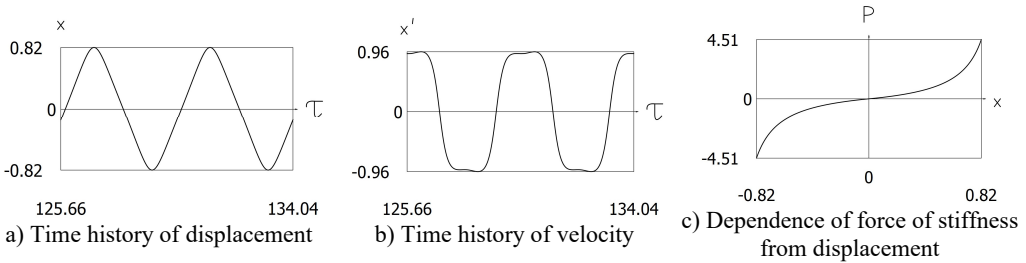


Fig. 5. Steady state motion for $h = 0.1, f = 1, v = 1.5$

For higher value of frequency of excitation, the nonlinear effect is greater, and this is clearly seen from the dependence of the force of stiffness from the displacement.

3. The model of a pipe robot with limited interactions

The schematic diagram of the pipe robot is depicted in Fig. 6.

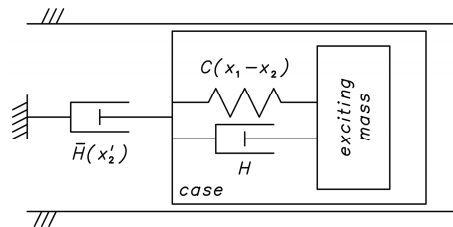


Fig. 6. Principle of operation of a pipe robot

The investigated system has two degrees of freedom and is described by the two differential equations:

$$x''_1 + h(x'_1 - x'_2) + \frac{1}{1 - |x_1 - x_2|} (x_1 - x_2) = f_0 \sin v \tau, \quad (2)$$

$$\mu x''_2 + h(x'_2 - x'_1) + \frac{1}{1 - |x_1 - x_2|} (x_2 - x_1) + \begin{cases} h_1 x'_2, & \text{when } x'_2 > 0 \\ h_2 x'_2, & \text{when } x'_2 < 0 \end{cases} = 0, \quad (3)$$

where x_1 denotes the displacement of the exciting mass located inside of the pipe robot, x_2 denotes the displacement of the case of the pipe robot, μ denotes the mass of the case of the investigated pipe robot, h denotes the coefficient of viscous friction between the exciting mass located inside of the pipe robot and the case of the investigated pipe robot, h_1 denotes the coefficient of viscous friction of the case of the investigated pipe robot with respect to the pipe for positive velocity of motion of the investigated pipe robot, h_2 denotes the coefficient of viscous friction of the case of the investigated pipe robot with respect to the pipe for negative velocity of

motion of the investigated pipe robot, f_0 denotes the amplitude of excitation, ν denotes the frequency of excitation, τ denotes the time, and prime denotes differentiation with respect to the time.

It was assumed that the parameters of the investigated vibrating system have the following values: $\mu = 0.1$, $h = 0.1$, $h_1 = 0.2$, $\nu = 1$. Investigations for two values of amplitude of excitation were performed at $f_0 = 1$ and $f_0 = 10$. Also, investigations for two values of viscous friction of the case of the investigated pipe robot with respect to the pipe for negative velocity of motion of the investigated pipe robot were performed at $h_2 = 0.1$ and $h_2 = 2$. Calculations from zero initial conditions were performed: $x_1(0) = 0$, $x_2(0) = 0$, $x'_1(0) = 0$, $x'_2(0) = 0$.

In order to visually estimate that the steady state regime has been reached two periods of steady state motions are represented.

4. Dynamics of the proposed model of a pipe robot with limited interactions

4.1. Dynamics of the pipe robot with limited interactions for $f_0 = 1$

4.1.1. Dynamics of the pipe robot with limited interactions for $h_2 = 0.1$

Displacement of the first degree of freedom, velocity of the first degree of freedom, displacement of the second degree of freedom, velocity of the second degree of freedom as functions of time are shown in Fig. 7.

Relative displacement and relative velocity as functions of time are shown in Fig. 8.

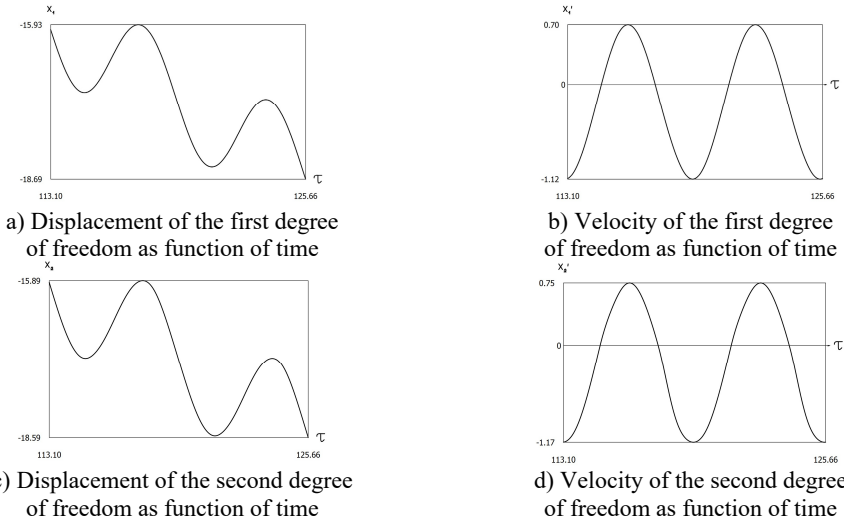


Fig. 7. Dynamics of the pipe robot with limited interactions for $\mu = 0.1$, $h = 0.1$, $h_1 = 0.2$, $\nu = 1$, $f_0 = 1$, $h_2 = 0.1$

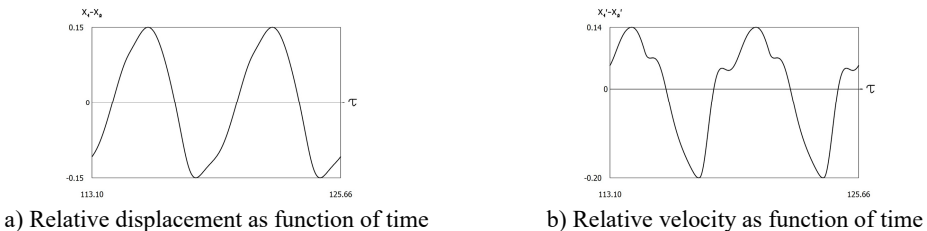


Fig. 8. Relative motions in the pipe robot with limited interactions for $\mu = 0.1$, $h = 0.1$, $h_1 = 0.2$, $\nu = 1$, $f_0 = 1$, $h_2 = 0.1$

4.1.2. Dynamics of the pipe robot with limited interactions for $h_2 = 2$

Displacement of the first degree of freedom, velocity of the first degree of freedom, displacement of the second degree of freedom, velocity of the second degree of freedom as functions of time are shown in Fig. 9.

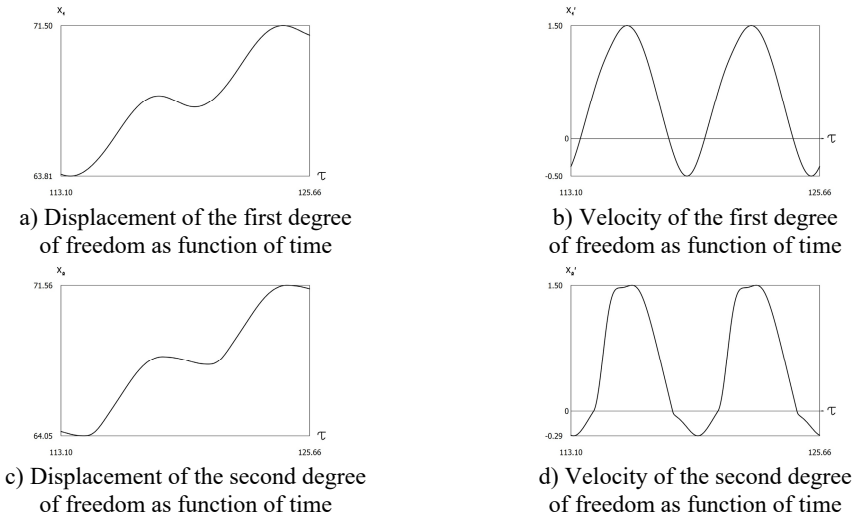


Fig. 9. Dynamics of the pipe robot with limited interactions for $\mu = 0.1, h = 0.1, h_1 = 0.2, \nu = 1, f_0 = 1, h_2 = 2$

Relative displacement and relative velocity as functions of time are shown in Fig. 10.

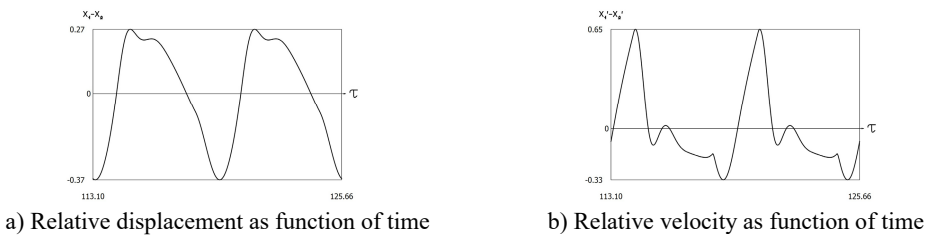


Fig. 10. Relative motions in the pipe robot with limited interactions for $\mu = 0.1, h = 0.1, h_1 = 0.2, \nu = 1, f_0 = 1, h_2 = 2$

From the presented results it is seen that for the first value of viscous friction of the case of the investigated pipe robot with respect to the pipe for negative velocity of motion of the investigated pipe robot motion of the pipe robot in the negative direction of the x axis is observed, while for the second value of viscous friction of the case of the investigated pipe robot with respect to the pipe for negative velocity of motion of the investigated pipe robot motion of the pipe robot in the positive direction of the x axis is observed.

4.2. Dynamics of the pipe robot with limited interactions for $f_0 = 10$

4.2.1. Dynamics of the pipe robot with limited interactions for $h_2 = 0.1$

Displacement of the first degree of freedom, velocity of the first degree of freedom, displacement of the second degree of freedom, velocity of the second degree of freedom as functions of time are shown in Fig. 11.

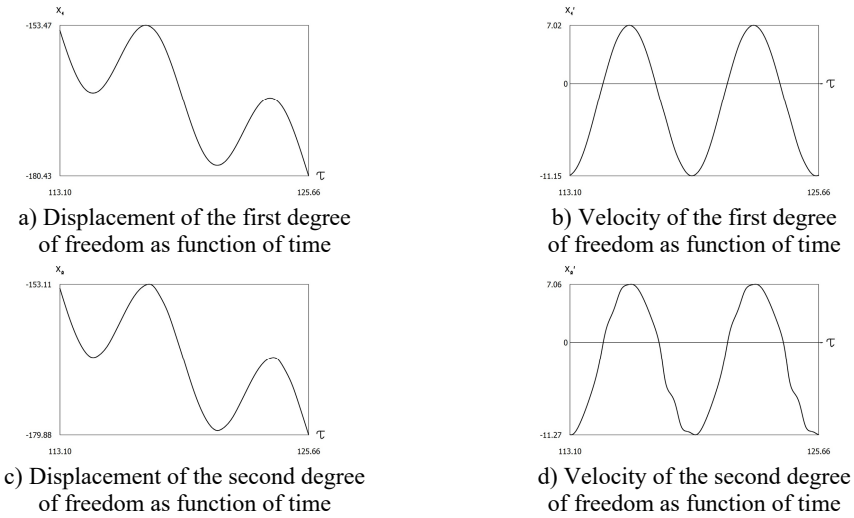


Fig. 11. Dynamics of the pipe robot with limited interactions
 for $\mu = 0.1, h = 0.1, h_1 = 0.2, \nu = 1, f_0 = 10, h_2 = 0.1$

Relative displacement and relative velocity as functions of time are shown in Fig. 12.

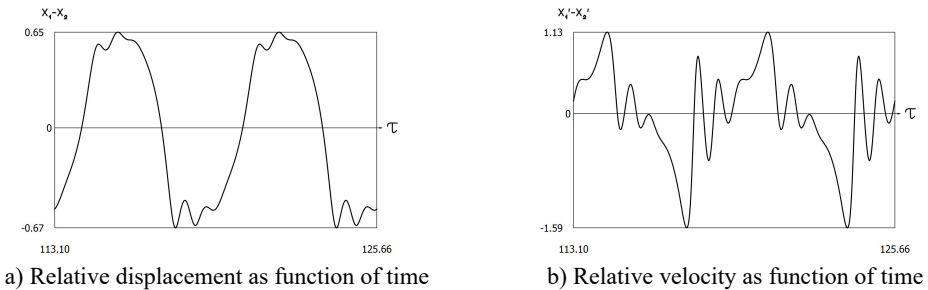


Fig. 12. Relative motions in the pipe robot with limited interactions
 for $\mu = 0.1, h = 0.1, h_1 = 0.2, \nu = 1, f_0 = 10, h_2 = 0.1$

4.2.2. Dynamics of the pipe robot with limited interactions for $h_2 = 2$

Displacement of the first degree of freedom, velocity of the first degree of freedom, displacement of the second degree of freedom, velocity of the second degree of freedom as functions of time are shown in Fig. 13.

Relative displacement and relative velocity as functions of time are shown in Fig. 14.

From the presented results it is seen that for the first value of viscous friction of the case of the investigated pipe robot with respect to the pipe for negative velocity of motion of the investigated pipe robot motion of the pipe robot in the negative direction of the x axis is observed, while for the second value of viscous friction of the case of the investigated pipe robot with respect to the pipe for negative velocity of motion of the investigated pipe robot motion of the pipe robot in the positive direction of the x axis is observed.

From the obtained results it can be seen that for the case when amplitude of excitation is high, the distance travelled by the investigated pipe robot with limited interactions is much greater than for the case when amplitude of excitation is low.

Similar model of a pipe robot without interactions of limited displacement type is investigated in [14]. From the results presented in this paper the effect of interactions of limited displacement type to the dynamic behavior of a pipe robot can be seen.

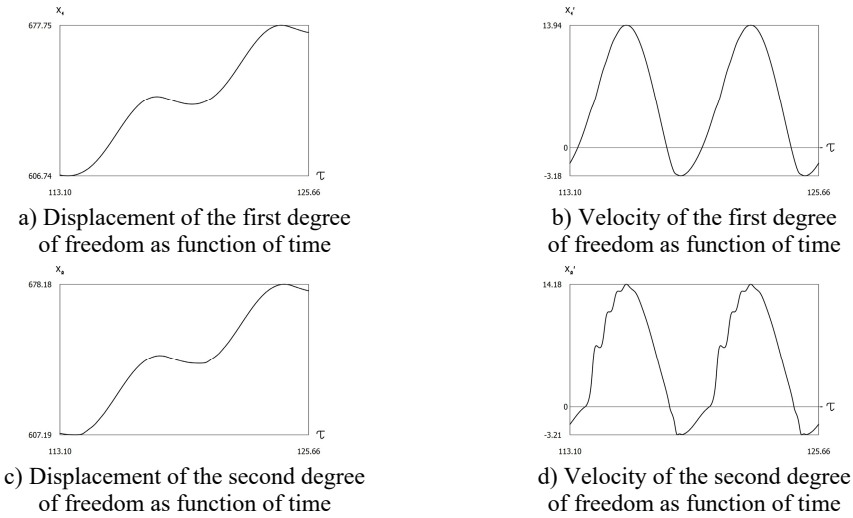


Fig. 13. Dynamics of the pipe robot with limited interactions
 for $\mu = 0.1$, $h = 0.1$, $h_1 = 0.2$, $\nu = 1$, $f_0 = 10$, $h_2 = 2$

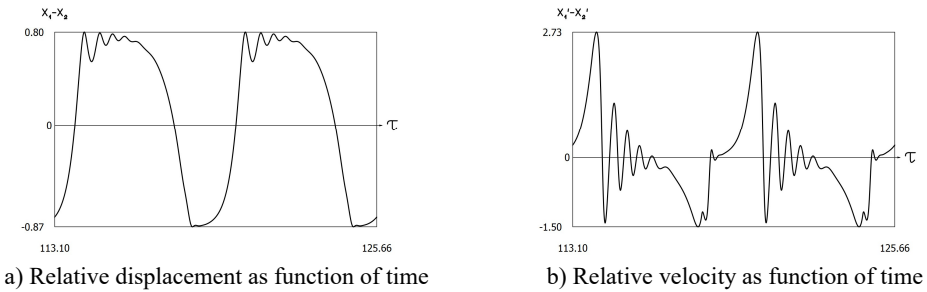


Fig. 14. Relative motions in the pipe robot with limited interactions
 for $\mu = 0.1$, $h = 0.1$, $h_1 = 0.2$, $\nu = 1$, $f_0 = 10$, $h_2 = 2$

5. Conclusions

Pipe robot with limited interactions is investigated. Nonlinear interactions between the exciting mass and the case of a pipe robot are important in order to prevent impacts of the exciting mass with the case of the pipe robot. Those impacts lead to deterioration of operation of a pipe robot and even may lead to destruction of some parts of the robot. Model for the analysis of dynamics of a pipe robot with two degrees of freedom and nonlinear interactions of limited relative displacement type is proposed in this paper. For this purpose, a special expression of nonlinear stiffness is used.

Results of numerical investigations for various parameters of the investigated pipe robot are presented. From the presented results it is seen that depending on the value of viscous friction of the case of the investigated pipe robot with respect to the pipe for negative velocity of motion of the investigated pipe robot motion of the pipe robot in the negative direction of the x axis can be observed as well as motion of the pipe robot in the positive direction of the x axis can be observed.

Also, from the obtained results it can be seen that for the case when amplitude of excitation is high, the distance travelled by the investigated pipe robot with limited interactions is much greater than for the case when amplitude of excitation is low.

The presented results can be used in the design of pipe robots with limited interactions.

Acknowledgements

The authors have not disclosed any funding.

Data availability

The datasets generated during and/or analyzed during the current study are available from the corresponding author on reasonable request.

Author contributions

Kazimieras Ragulskis: conceptualization, formal analysis, investigation, methodology, supervision, validation, visualization, writing – original draft preparation, writing – review and editing. Bronislovas Spruogis: formal analysis, investigation, methodology, supervision, validation, visualization, writing – original draft preparation, writing – review and editing. Arvydas Matuliauskas: formal analysis, investigation, methodology, validation, visualization, writing – original draft preparation, writing – review and editing. Vygantas Mištinas: formal analysis, investigation, methodology, validation, visualization, writing – original draft preparation, writing – review and editing. Liutauras Ragulskis: visualization.

Conflict of interest

The authors declare that they have no conflict of interest.

References

- [1] W. V. Wedig, “New resonances and velocity jumps in nonlinear road-vehicle dynamics,” *Procedia IUTAM*, Vol. 19, pp. 209–218, 2016, <https://doi.org/10.1016/j.piutam.2016.03.027>
- [2] T. Li, E. Gourc, S. Seguy, and A. Berlioz, “Dynamics of two vibro-impact nonlinear energy sinks in parallel under periodic and transient excitations,” *International Journal of Non-Linear Mechanics*, Vol. 90, pp. 100–110, Apr. 2017, <https://doi.org/10.1016/j.ijnonlinmec.2017.01.010>
- [3] V. A. Zaitsev, “Global asymptotic stabilization of periodic nonlinear systems with stable free dynamics,” *Systems and Control Letters*, Vol. 91, pp. 7–13, May 2016, <https://doi.org/10.1016/j.sysconle.2016.01.004>
- [4] H. Dankowicz and E. Fotsch, “On the analysis of chatter in mechanical systems with impacts,” *Procedia IUTAM*, Vol. 20, pp. 18–25, 2017, <https://doi.org/10.1016/j.piutam.2017.03.004>
- [5] S. Spedicato and G. Notarstefano, “An optimal control approach to the design of periodic orbits for mechanical systems with impacts,” *Nonlinear Analysis: Hybrid Systems*, Vol. 23, pp. 111–121, Feb. 2017, <https://doi.org/10.1016/j.nahs.2016.08.009>
- [6] W. Li, N. E. Wierschem, X. Li, and T. Yang, “On the energy transfer mechanism of the single-sided vibro-impact nonlinear energy sink,” *Journal of Sound and Vibration*, Vol. 437, pp. 166–179, Dec. 2018, <https://doi.org/10.1016/j.jsv.2018.08.057>
- [7] J. S. Marshall, “Modeling and sensitivity analysis of particle impact with a wall with integrated damping mechanisms,” *Powder Technology*, Vol. 339, pp. 17–24, Nov. 2018, <https://doi.org/10.1016/j.powtec.2018.07.097>
- [8] E. Salahshoor, S. Ebrahimi, and Y. Zhang, “Frequency analysis of a typical planar flexible multibody system with joint clearances,” *Mechanism and Machine Theory*, Vol. 126, pp. 429–456, Aug. 2018, <https://doi.org/10.1016/j.mechmachtheory.2018.04.027>
- [9] U. Starossek, “Forced response of low-frequency pendulum mechanism,” *Mechanism and Machine Theory*, Vol. 99, pp. 207–216, May 2016, <https://doi.org/10.1016/j.mechmachtheory.2016.01.004>
- [10] S. Wang, L. Hua, C. Yang, Y.O. Zhang, and X. Tan, “Nonlinear vibrations of a piecewise-linear quarter-car truck model by incremental harmonic balance method,” *Nonlinear Dynamics*, Vol. 92, No. 4, pp. 1719–1732, Jun. 2018, <https://doi.org/10.1007/s11071-018-4157-6>
- [11] P. Alevras, S. Theodossiades, and H. Rahnejat, “On the dynamics of a nonlinear energy harvester with multiple resonant zones,” *Nonlinear Dynamics*, Vol. 92, No. 3, pp. 1271–1286, May 2018, <https://doi.org/10.1007/s11071-018-4124-2>

- [12] A. Sinha, S. K. Bharti, A. K. Samantaray, G. Chakraborty, and R. Bhattacharyya, “Sommerfeld effect in an oscillator with a reciprocating mass,” *Nonlinear Dynamics*, Vol. 93, No. 3, pp. 1719–1739, Aug. 2018, <https://doi.org/10.1007/s11071-018-4287-x>
- [13] G. Habib, G. I. Cirillo, and G. Kerschen, “Isolated resonances and nonlinear damping,” *Nonlinear Dynamics*, Vol. 93, No. 3, pp. 979–994, Aug. 2018, <https://doi.org/10.1007/s11071-018-4240-z>
- [14] K. Ragulskis, B. Spruogis, M. Bogdevičius, A. Matuliauskas, V. Mištinās, and L. Ragulskis, “Dynamics of a two mass pipe robot with the self-stopping mechanism based on viscous friction,” *Mathematical Models in Engineering*, Vol. 6, No. 4, pp. 172–178, Dec. 2020, <https://doi.org/10.21595/mme.2020.21824>



Kazimieras Ragulskis is a member of Academies of Sciences of the USSR (later of the Russian Academy of Sciences) and Lithuania. His research area is precise vibromechanics and vibroengineering, the basis of it are vibrations and waves in nonlinear dynamical systems.



Bronislovas Spruogis is a Professor of the Department of Mobile Machinery and Railway Transport of the Faculty of Transport Engineering of Vilnius Gediminas Technical University. His main research interests are dynamics and design of mechanical and hydraulic systems.



Arvydas Matuliauskas is a Lecturer of the Department of Mobile Machinery and Railway Transport of the Faculty of Transport Engineering of Vilnius Gediminas Technical University. His main research interests are dynamics and design of robots.



Vyngantas Mištinās is a Lecturer of the Department of Mobile Machinery and Railway Transport of the Faculty of Transport Engineering of Vilnius Gediminas Technical University. His main research interests are dynamics and design of robots.



Liutauras Ragulskis is working as a research associate at Vytautas Magnus University. His research interests are numerical calculations of vibrating systems.